


## HEIDI-D

~10° diffused spot beam


### TECHNICAL SPECIFICATIONS:

Dimensions	Ø 21.6 mm
Height	11.9 mm
Fastening	tape, pin
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	10.6 kg
Quantity in Box	3264 pcs
ROHS compliant	yes ⓘ

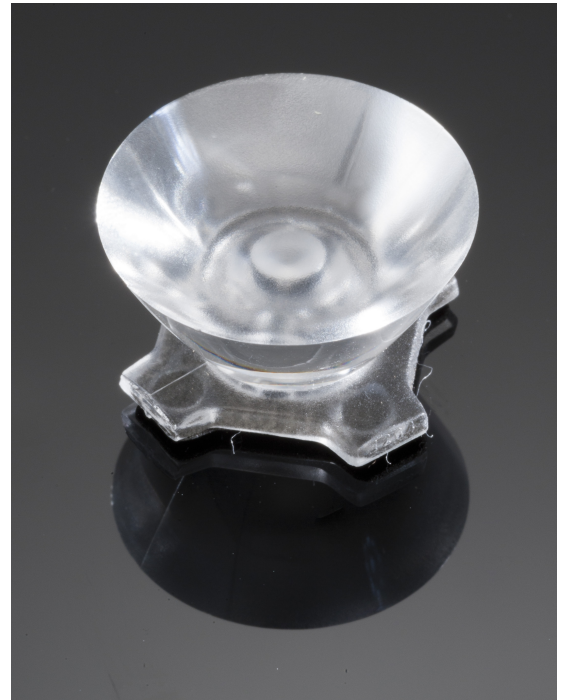

### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
HEIDI-D	Lens	PMMA	clear
HEIDI-TAPE	Tape	PU tape	black

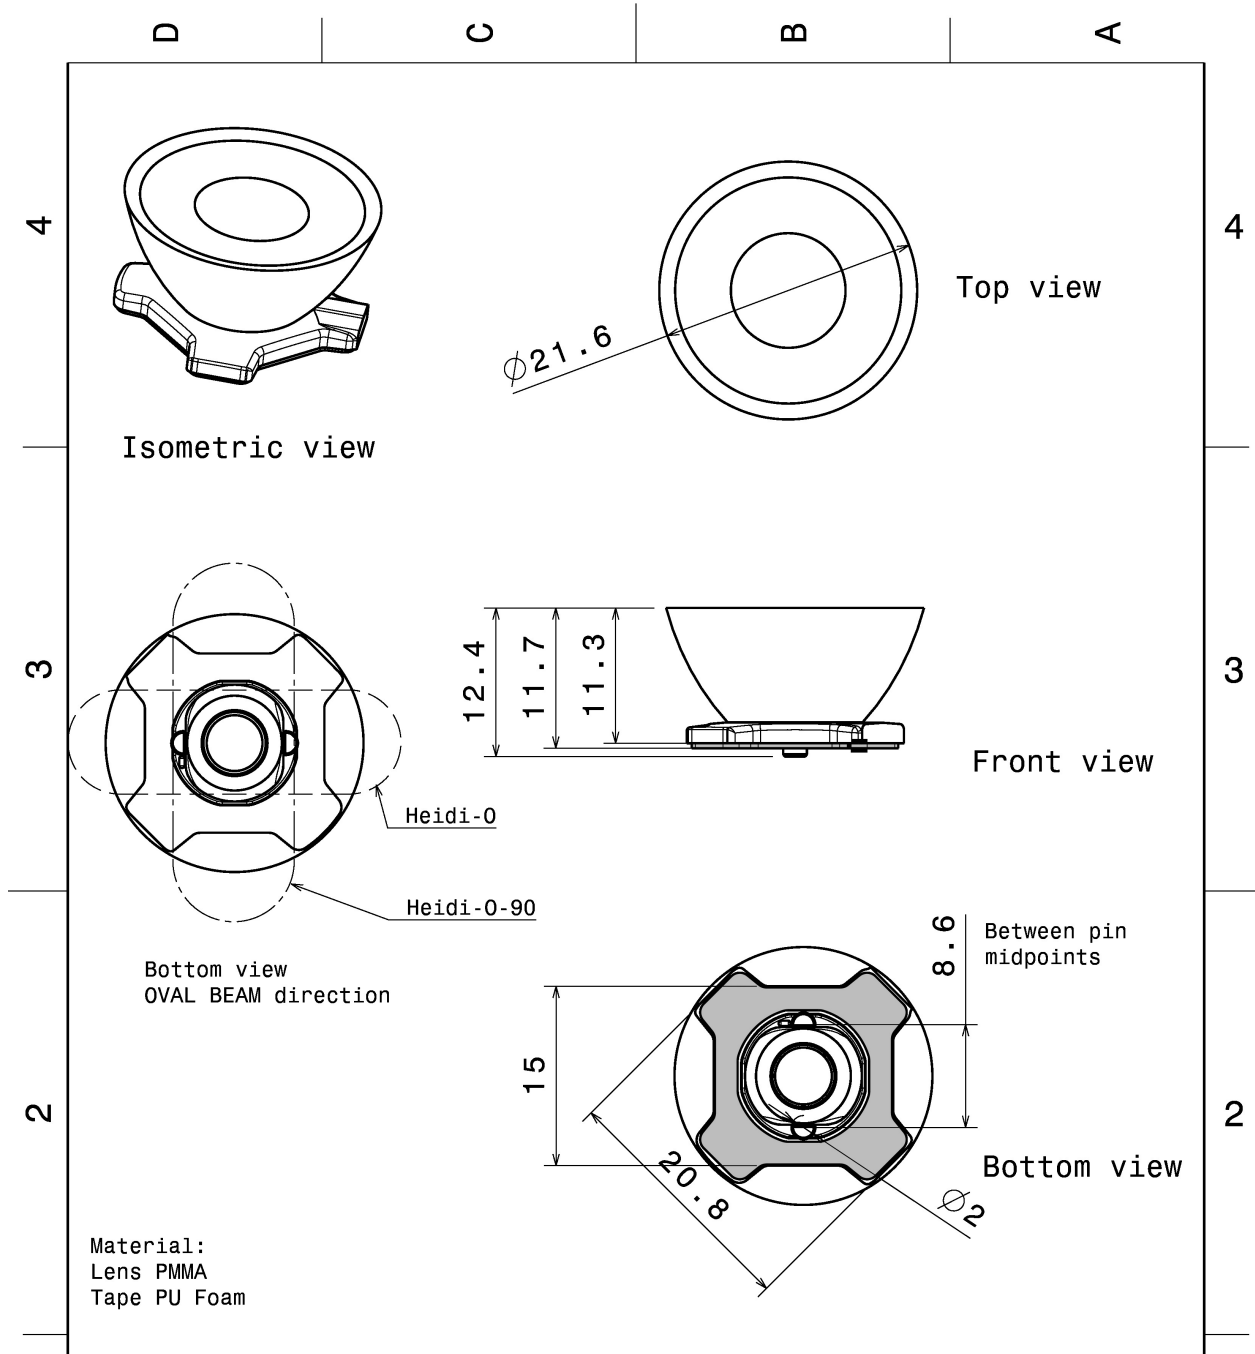

This drawing is our property. It can't be reproduced or communicated without our written agreement.		<b>LEDiL</b>		Ledil Oy Salorankatu 10 FIN-24100 SALO Finland	
DRAWING TITLE		<b>Datasheet Heidi-Series Assy</b>			
DRAWN BY ah	DATE 1.2.2012	SIZE A4	DRAWING NUMBER		REV 2
CHECKED BY	DATE	SCALE 2:1	WEIGHT (g)	SHEET 1/1	
DESIGNED BY	DATE				

### PHOTOMETRIC DATA (MEASURED):

#### CREE

LED XB-D  
FWHM 10.0°  
Efficiency 90 %  
Peak intensity 12.550 cd/lm  
Required components:


#### CREE

LED XB-H  
FWHM 11.0°  
Efficiency 87 %  
Peak intensity 12.700 cd/lm  
Required components:



#### CREE

LED XD16  
FWHM 10.0°  
Efficiency 93 %  
Peak intensity 14.100 cd/lm  
Required components:

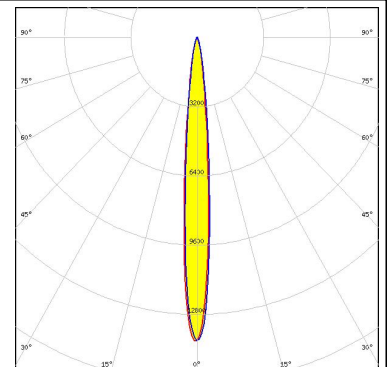


#### CREE

LED XP-E  
FWHM 9.0°  
Efficiency 93 %  
Peak intensity 22.000 cd/lm  
Required components:


#### PHOTOMETRIC DATA (MEASURED):




LED XP-E2  
 FWHM 10.0°  
 Efficiency 88 %  
 Peak intensity 17.400 cd/lm  
 Required components:

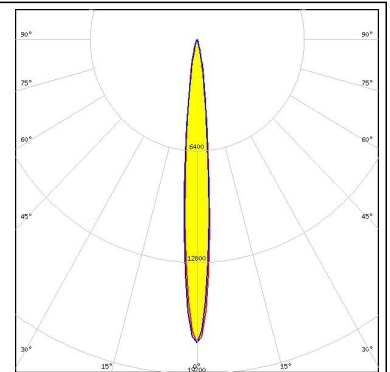


LED XP-G  
 FWHM 12.0°  
 Efficiency 93 %  
 Peak intensity 14.500 cd/lm  
 Required components:

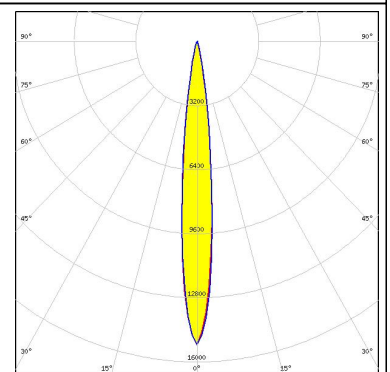

LED XP-G2  
 FWHM 11.0°  
 Efficiency 88 %  
 Peak intensity 15.000 cd/lm  
 Required components:

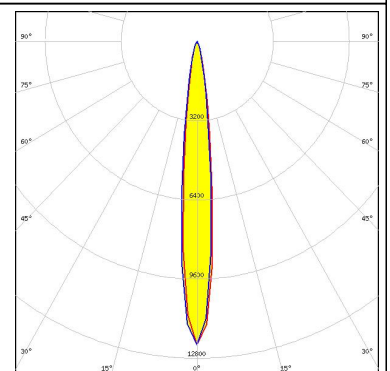



LED XQ-E HI  
 FWHM 7.0°  
 Efficiency 93 %  
 Peak intensity 24.800 cd/lm  
 Required components:

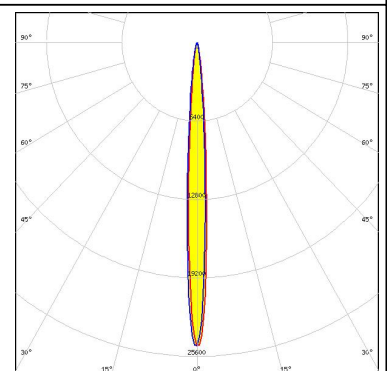


#### PHOTOMETRIC DATA (MEASURED):




LED XT-E  
 FWHM 10.0°  
 Efficiency 90 %  
 Peak intensity 14.300 cd/lm  
 Required components:

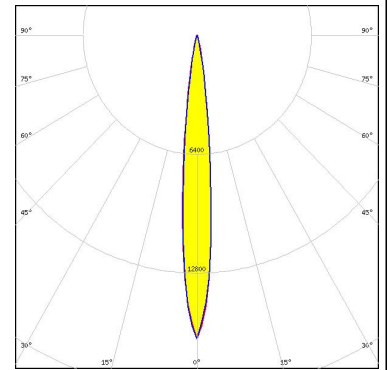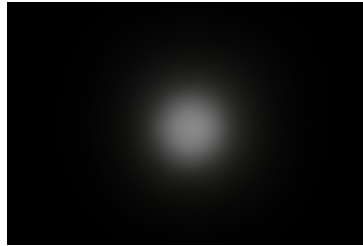


LED LUXEON C  
 FWHM 9.0°  
 Efficiency 89 %  
 Peak intensity 17.800 cd/lm  
 Required components:

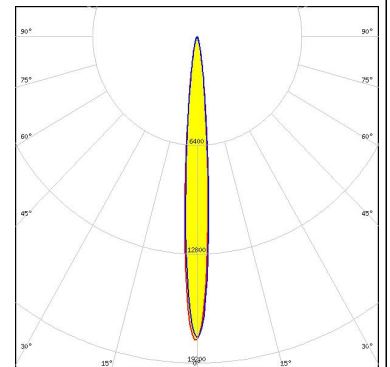

LED LUXEON CZ  
 FWHM 7.0°  
 Efficiency 94 %  
 Peak intensity 29.000 cd/lm  
 Required components:

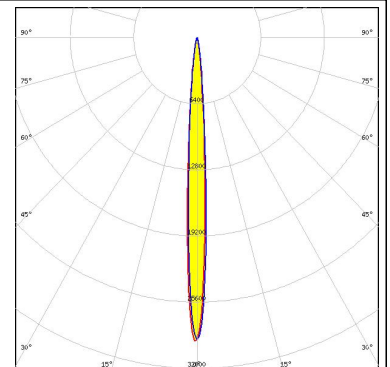


LED LUXEON T  
 FWHM 12.0°  
 Efficiency 89 %  
 Peak intensity 11.500 cd/lm  
 Required components:

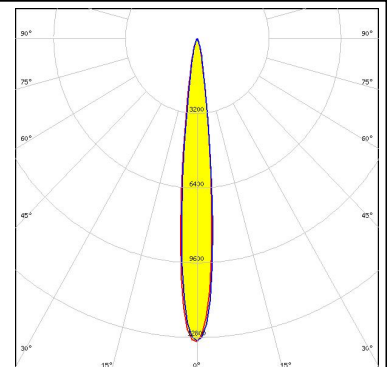

### PHOTOMETRIC DATA (MEASURED):





LED LUXEON TX  
FWHM 12.0°  
Efficiency 88 %  
Peak intensity 13.600 cd/lm  
Required components:

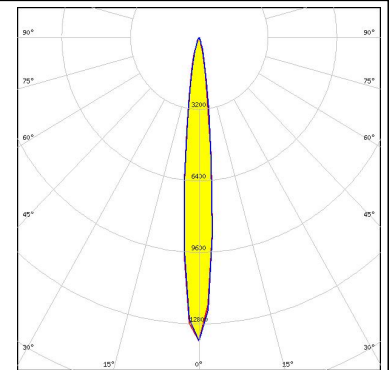

LED NCSxx19A  
FWHM 9.0°  
Efficiency 88 %  
Peak intensity 11.900 cd/lm  
Required components:



LED NCSxx19B  
FWHM 11.0°  
Efficiency 85 %  
Peak intensity 14.200 cd/lm  
Required components:

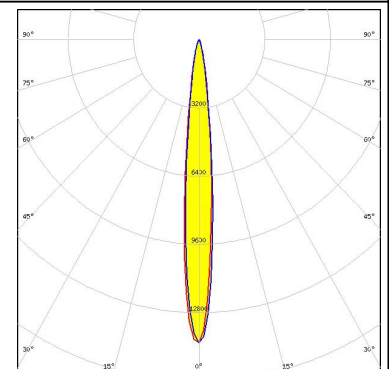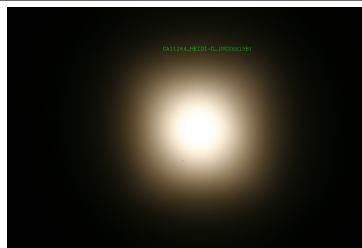


LED NVSxx19A  
FWHM 12.0°  
Efficiency 88 %  
Peak intensity 8.900 cd/lm  
Required components:

### PHOTOMETRIC DATA (MEASURED):



LED NVSxx19B/NVSxx19C  
FWHM 14.0°  
Efficiency 91 %  
Peak intensity 10.000 cd/Im  
Required components:

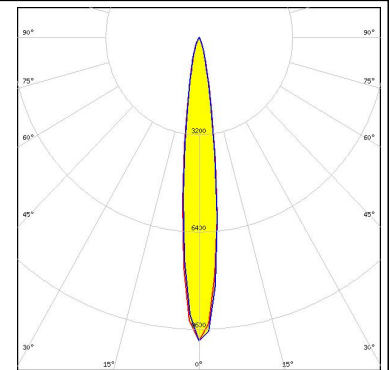

LED Oslon Square EC  
FWHM 10.0°  
Efficiency 90 %  
Peak intensity 12.900 cd/Im  
Required components:



LED Oslon SSL 150  
FWHM 9.0°  
Efficiency 92 %  
Peak intensity 15.000 cd/Im  
Required components:




LED Oslon SSL 80  
FWHM 7.0°  
Efficiency 89 %  
Peak intensity 19.300 cd/Im  
Required components:

### PHOTOMETRIC DATA (MEASURED):


#### SAMSUNG

LED LH181A  
FWHM 10.0°  
Efficiency 88 %  
Peak intensity 10.000 cd/lm  
Required components:

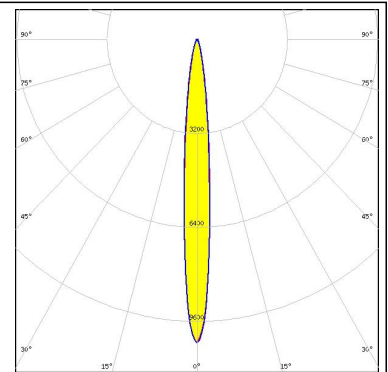



#### SAMSUNG

LED LH181B  
FWHM 11.0°  
Efficiency 94 %  
Peak intensity 11.800 cd/lm  
Required components:

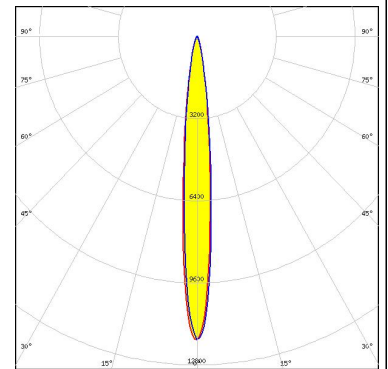



#### SAMSUNG

LED LH351B  
FWHM 14.0°  
Efficiency 88 %  
Peak intensity 10.000 cd/lm  
Required components:

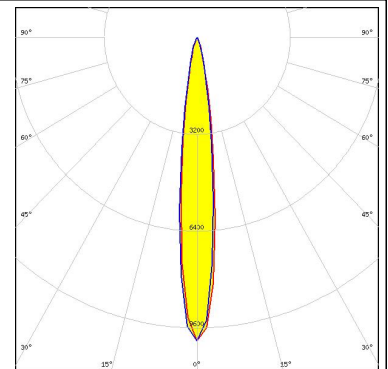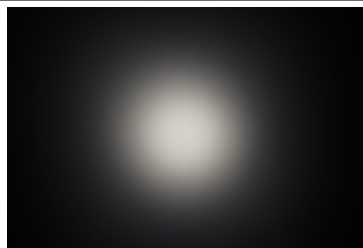


#### SAMSUNG

LED LH351Z  
FWHM 12.0°  
Efficiency 88 %  
Peak intensity 13.300 cd/lm  
Required components:

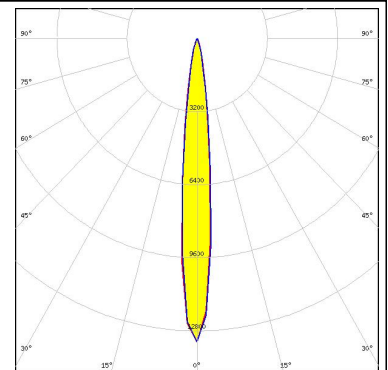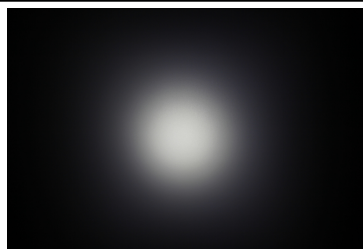




## PHOTOMETRIC DATA (MEASURED):

	
SEOUL SEMICONDUCTOR	
LED	Z5
FWHM	8.0°
Efficiency	87 %
Peak intensity	22.300 cd/lm
Required components:	

### PHOTOMETRIC DATA (SIMULATED):


#### LUMILEDS

LED LUXEON 3030 HV  
 FWHM 11.0°  
 Efficiency 94 %  
 Peak intensity 16.430 cd/lm  
 Required components:

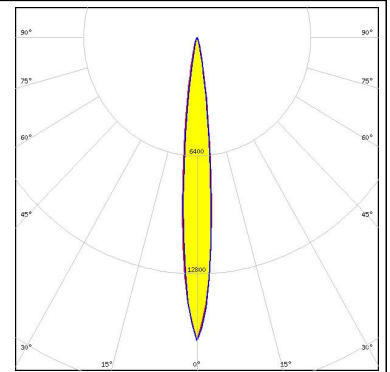


#### LUMILEDS

LED LUXEON Z  
 FWHM 8.5°  
 Efficiency 94 %  
 Peak intensity 32.403 cd/lm  
 Required components:

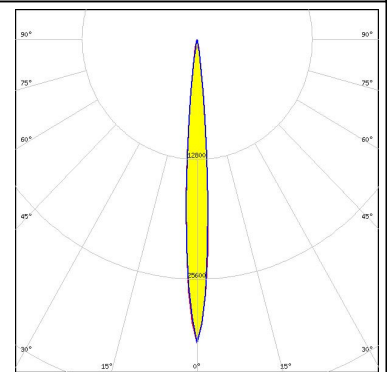


#### LUMILEDS

LED LUXEON Z ES  
 FWHM 7.7°  
 Efficiency 94 %  
 Peak intensity 33.500 cd/lm  
 Required components:

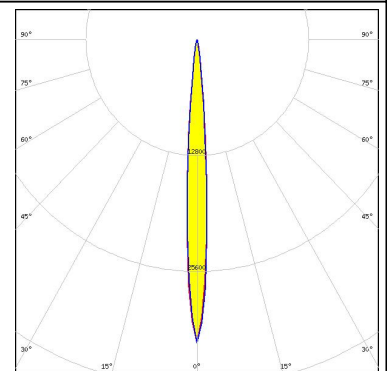

#### OSRAM Opto Semiconductors


LED Oslon Square Gen3  
 FWHM 13.0°  
 Efficiency 94 %  
 Peak intensity 13.300 cd/lm  
 Required components:

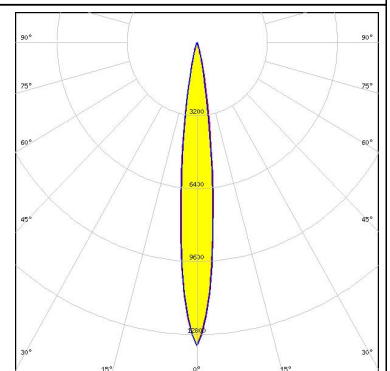

### PHOTOMETRIC DATA (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED Oslon SSL 80  
FWHM 9.4°  
Efficiency 94 %  
Peak intensity 20.070 cd/lm  
Required components:

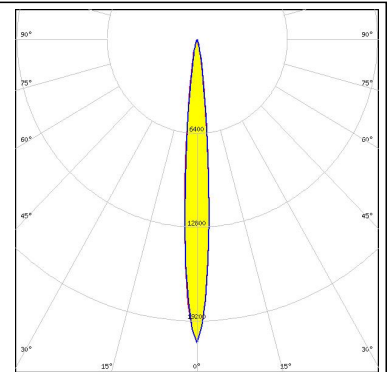

**SEKUL**  
SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2  
FWHM 10.0°  
Efficiency 90 %  
Peak intensity 17.000 cd/lm  
Required components:

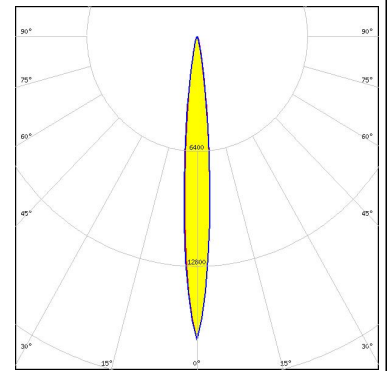

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)