


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: PICO  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.  
AVAILABLE IN TEN COLORS.  
CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED  
PER MIL-G-45204 B TYPE 1  
0.00001" [0.000254] THK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

- P/N W-701/COLOR  
28AWG 19X40 TINNED COPPER  
0.047 [1.19] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

- PERFORMANCE  
MAXIMUM CURRENT: 1.0 AMPS  
MAXIMUM VOLTAGE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

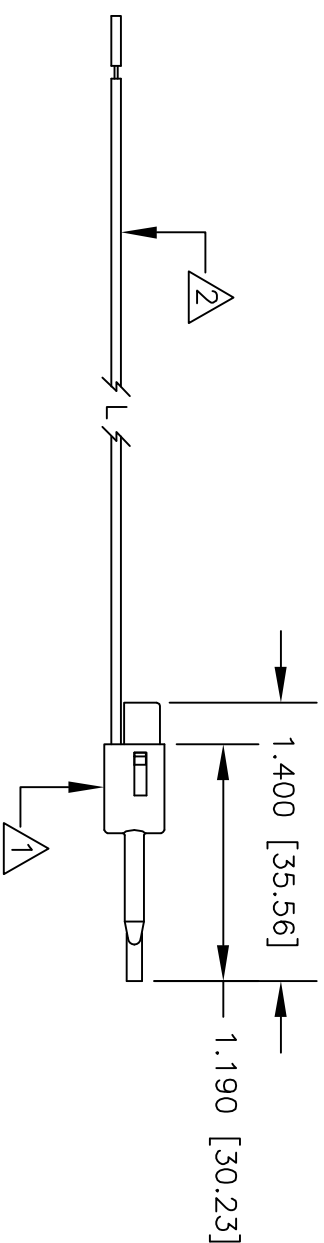

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±	±	APPROVALS	<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
	.XXX ±			DATE	
				APPROVED BY	
MATERIAL SEE NOTE.		DRAWN R.L.		9/10	PICO HOOK TO LEAD ONLY
FINISH SEE NOTE.		APPROVED BY			
APPLICATION USED ON		SCALE		1:1	
DO NOT SCALE DRAWING		SHEET		1 OF 1	
		SIZE CODE IDENT NO. DRAWING NO.		REV.	
		A 08505 P713			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.